



Systemabdichtungsbaustoffe

KAUBIT Aktiengesellschaft • Industriestraße 1 • 49413 Dinklage
Telephone: +49 4443 9669-0 • Telefax: +49 4443 9669-66 • Internet: www.kaubit.de • E-Mail: info@kaubit.de

Kaubit FA Floor Sleeve NVV

Technical Data Sheet

01.12.2021

Elastic both side fleece coated sleeve for a permanent sealing of floor drains in combination with sealing systems under tiles.

Properties:

Kaubit FA Floor Sleeve NVV is watertight, permanently elastic sealing. The sleeve is made from fleece coated NBR-Rubber with a centrally elastic zone. This material basis causes an excellent bonding with almost any waterproofing materials used under tiles extending over the entire surface of the sleeve.

Applications:

Kaubit FA Floor Sleeve NVV is used to permanently waterproof ground drains. The packing is complete embedded into the sealing compound.

Technical specifications:

Measurements: 350 x 350 mm
Thickness: 1.1 mm
Temperature resistance: -20°C to +90°C

Preparation of the substrate:

The preparation of the surface depends on the respective waterproofing system used.

Use:

The Kaubit FA Floor Sleeve NVV is put over the drain passage, laid and pressed into the fresh sealing mass. When applying the second coating with the sealing mass the entire packing is coated as well. When the waterproofing system has to be applied in one coat the packing is laid into a previously applied thin layer of the system before the system is applied over the whole area.

Information on further processing:


Kaubit FA Floor Sleeve NVV is absolutely silicone compatible; a soaking must not be expected. For lining the joints usual silicones may be applied. Solvent-free adhesives and coatings may be applied directly onto the Kaubit FA Floor Sleeve NVV. We recommend before applying further products a compatibility test has to be carried out.

Cleaning of tools and equipment:

Tools and soiled areas should be cleaned immediately after use with water.

Storage:

Kaubit FA Floor Sleeve NVV can be used for a period of at least 24 months when stored in a cool and dry period.

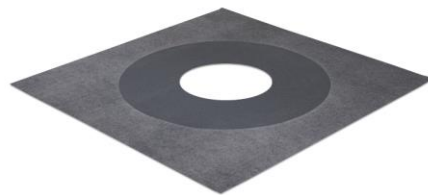

Supplied as:

5 pieces / carton
10 pieces / carton

Further units available on request.

Safety information:

The product is not hazardous as defined in the (German) Hazardous Substances Code.

Disposal:

May be disposed of as building site waste.