



Systemabdichtungsbaustoffe

KAUBIT Aktiengesellschaft • Industriestraße 1 • 49413 Dinklage
Telephone: +49 4443 9669-0 • Telefax: +49 4443 9669-66 • Internet: www.kaubit.de • E-Mail: info@kaubit.de

Kaubit FA Floor Sleeve PEVVN

Technical Data Sheet

01.12.2021

Double-sided, fleece-coated sleeve for a permanent sealing of floor drains in combination with sealing systems under tiles.

Properties:

Kaubit FA Floor Sleeve PEVVN is watertight, permanently sealing. The packing is made of polyethylene with double side fleece coating. The flexible zone made of NBR rubber is absolutely flexible and has a good recovery properties. This material basis causes an excellent bonding with almost any waterproofing materials used under tiles extending over the entire surface of the sleeve.

Applications:

Kaubit FA Floor Sleeve PEVVN is used to permanently waterproof floor drains. The packing is complete embedded into the sealing compound / material.

Technical specifications:

Measurements: 350 x 350 mm
Thickness: 0.4 mm

Preparation of the substrate:

The preparation of the surface depends on the respective waterproofing system used.

Use:


The Kaubit FA Floor Sleeve PEVVN is put over the drain passage, laid and pressed into the fresh sealing mass. When applying the second coating with the sealing mass the entire packing is coated as well. When the waterproofing system has to be applied in one coat the packing is laid into a previously applied thin layer of the system before the system is applied over the whole area. The required hole for the floor drain has to be made beforehand as per requirement at site.

Information on further processing:

Kaubit FA Floor Sleeve PEVVN is absolutely silicone-compatible; a soaking must not be expected. For lining the joints usual silicones may be applied. Solvent-free adhesives and coatings may be applied directly onto the Kaubit FA Floor Sleeve PEVVN. Before applying further products a compatibility test has to be carried out.

Cleaning of tools and equipment:

Tools and soiled areas should be cleaned immediately after use with water.

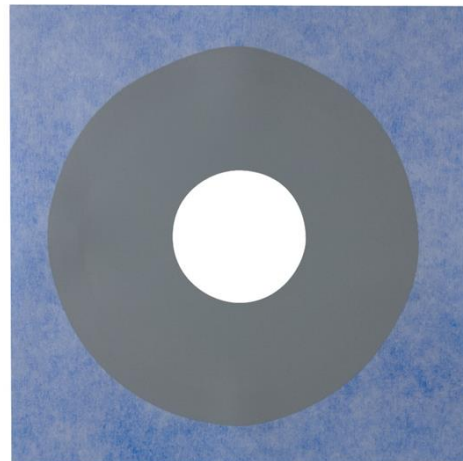

Storage:

Kaubit FA Floor Sleeve PEVVN can be used for a period of at least 24 months when stored in a cool and dry period.

Supplied as:

5 pieces / carton
10 pieces / carton

Further units and individual sizes on request.

Safety information:

The product is not hazardous as defined in the (German) Hazardous Substances Code.

Disposal:

May be disposed of as building site waste.