



Systemabdichtungsbaustoffe

KAUBIT Aktiengesellschaft • Industriestraße 1 • 49413 Dinklage
Telephone: +49 4443 9669-0 • Telefax: +49 4443 9669-66 • Internet: www.kaubit.de • E-Mail: info@kaubit.de

Kaubit FA Inside Corner NG

Technical Data Sheet

01.12.2021

Elastic shape for durable sealing of inside corners in combination with sealing systems under tiles.

Properties:

Kaubit FA Inside Corner NG is watertight, durable-elastic sealing. The pre-formed pieces are made from NBR-Rubber with a centrally inserted fabric layer. This material basis causes an excellent bonding with almost any waterproofing materials used under tiles extending over the entire surface of the corner.

Applications:

Kaubit FA Inside Corner NG is used as durable, watertight sealing in corners beneath ceramic layers. The inside corners are embedded full surface in the sealing mass used.

Technical specifications:

Thickness: 0.6 mm
Temperature resistance: -20°C to +90°C

Preparation of the substrate:

Preparation of the grounds is done according to the sealing system used.

Use:

The corner areas are first of all spread with a layer of Sealing Compound. Each corner is then placed on the fresh sealant and pressed in. When dry, the Kaubit FA Inside Corners NG is then also covered full surface with a second layer of Sealing Compound.

Information on further processing:

Kaubit FA Inside Corner NG is absolutely silicone-compatible; a soaking must not be expected. Solvent-free adhesives and coatings may be applied directly onto the inside corner. Before applying further products a compatibility test has to be carried out.

Cleaning of tools and equipment:

Tools and soiled areas should be cleaned immediately after use with water


Storage:

Kaubit FA Inside Corner NG can be used for a period of at least 24 months when stored in a cool and dry place.

Supplied as:

10 pieces / carton
25 pieces / carton

Further units available on request.

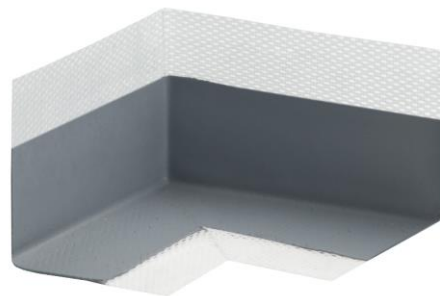

Safety information:

This product is not hazardous as defined in the (German) Hazardous Substances Code.

Disposal:

May be disposed of as building site waste.