



Systemabdichtungsbaustoffe

KAUBIT Aktiengesellschaft • Industriestraße 1 • 49413 Dinklage
Telephone: +49 4443 9669-0 • Telefax: +49 4443 9669-66 • Internet: www.kaubit.de • E-Mail: info@kaubit.de

Kaubit FA Sealing Tape NG 300

Technical Data Sheet

01.12.2021

NBR rubber tape for sealing movement joints

Properties:

Kaubit FA Sealing Tape NG 300 is an elastic sealing tape on the basis of NBR rubber. The Tape has a good rebound resilience. By using NBR rubber as base material it has an excellent compatibility with all commonly used, solvent-free bituminous coatings. As well the sealing tape can be fixed with solvent-free epoxy resin.

Applications:

Kaubit FA Sealing Tape NG 300 has been developed especially for the difficult field of bridging building joints.

Technical specifications:

Basis:	NBR rubber
Colour:	grey
Thickness:	1 mm

Preparation of the substrate:

The surface has to be solid, stable and flat, as well as free of oil, grease, dust and other separating layers before applying the bituminous coating. Apply Kaubit Primer BE 12 as a primer on absorbent surfaces. The primer has to be ventilated before the scraped filling coat is applied. Then the corresponding thick coating is applied on both sides of the joints onto the pre-treated surface. The sealing tape is laid into the thick coating.

Use:




Insert the boundary areas of the tape into the fresh thick coating that works as a bonding agent. Uneven or faulty areas can be pressed down using a trowel. When there is low to medium tensile loading effecting on the sealing tape it is sufficient to lay it evenly in a straight line across the joint. Make sure that the tension area remains free when bonding the sealing tape. If necessary it can be covered with a polyethylene strip. When there is an increased tensile loading effecting we recommend to fix the sealing tape in the shape of a loop.

Consumption:

Consider an overlapping of at least 5 cm as per requirement.

Information on further processing:

Solvent-free adhesives and coatings can be applied directly onto Kaubit FA Sealing Tape NG 300.

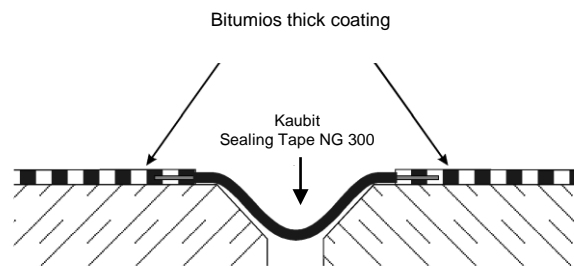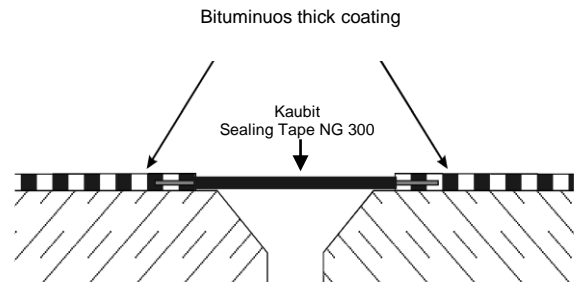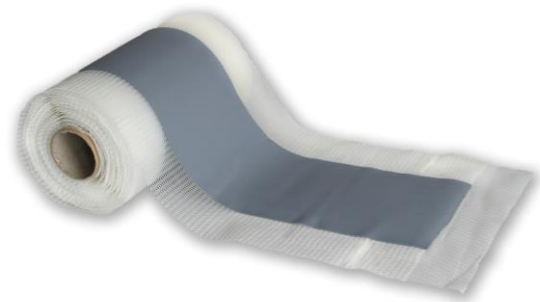

Cleaning tools and equipment:

Tools are to be cleaned with water immediately after use.

Storage:

When stored in a cool and dry place stored in its originally closed containers 12 month.



Systemabdichtungsbaustoffe

KAUBIT Aktiengesellschaft • Industriestraße 1 • 49413 Dinklage
Telephone: +49 4443 9669-0 • Telefax: +49 4443 9669-66 • Internet: www.kaubit.de • E-Mail: info@kaubit.de

Supplied as:

rolls à 30 m
1 roll / cardboard box
30 cardboard boxes / pallet

rolls à 6 m with 2 end pieces:
1 roll / cardboard box

Safety information:

Kaubit FA Sealing Tape NG 300 has not been classified as hazardous material according to the German Gefahrstoffverordnung (Dangerous Goods Regulations).

Disposal:

May be disposed of as construction waste.