



Systemabdichtungsbaustoffe

KAUBIT Aktiengesellschaft • Industriestraße 1 • 49413 Dinklage
Telephone: +49 4443 9669-0 • Telefax: +49 4443 9669-66 • Internet: www.kaubit.de • E-Mail: info@kaubit.de

Kaubit FA Wall Sleeve NVV

Technical Data Sheet

01.12.2021

Elastic both sided fleece coated sleeve for a permanent sealing of pipe passages in combination with sealing systems under tiles.

Properties:

Kaubit FA Wall Sleeve NVV is watertight, permanently elastic sealing. The packing is made from fleece coated NBR-Rubber with a central flexible zone. This material basis causes an excellent bonding with almost any waterproofing materials used under tiles extending over the entire surface of the sleeve.

Applications:

Kaubit FA Wall Sleeve NVV is suitable as permanently watertight sealing on wall areas for pipe passages of shower and bathtub water fittings under ceramic coverings. The sleeve is complete embedded into the Kaubiflex FA Sealing Compound or other sealants.

Technical specifications:

Measurements: 100 mm up to 250 mm
squared
Thickness: 0.6 mm
Temperature resistance: -20°C to +90°C

Preparation of the substrate:

The preparation of the surface depends on the respective waterproofing system used.

Use:

The sleeve is put over the pipe passage, laid and pressed into the fresh sealing mass. When applying the second coating with the sealing mass the entire packing is coated as well. When the waterproofing system has to be applied in one coat the packing is laid into a previously applied thin layer of the system before the system is applied over the whole area.

Information on further processing:


Kaubit FA Wall Sleeve NVV is absolutely silicone-compatible; a soaking must not be expected. For lining the joints usual silicones may be applied. Solvent-free adhesives and coatings may be applied directly onto the Kaubit FA Wall Packing. Before applying further products a compatibility test has to be carried out.

Cleaning of tools and equipment:

Tools and soiled areas should be cleaned immediately after use with water.

Storage:

Kaubit FA Wall Sleeve NVV can be used for a period of at least 24 months when stored in a cool and dry period.

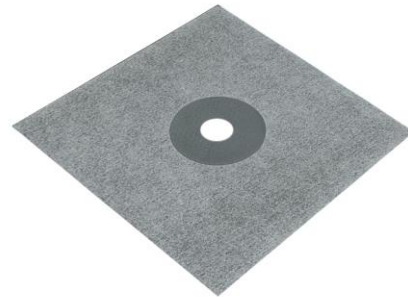

Supplied as:

10 pieces / carton
20 pieces / carton

Further units available on request.

Safety information:

The product is not hazardous as defined in the (German) Hazardous Substances Code.

Disposal:

May be disposed of as building site waste.